


LLP 120 TL

120W LED Tunnel Light



Lighting arrangement curve

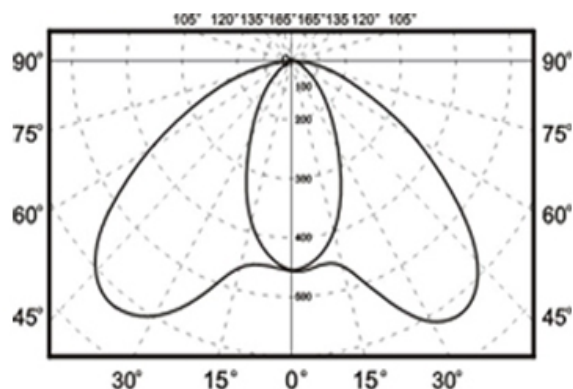

MAIN SPECIFICATIONS

Total Consumed Power	60 ~ 120W (total output power)
Input Voltage / Frequency	AC 85 ~ 125V or 180 ~ 250V - 50/60Hz
Power Factor	>0.98
Power Efficiency	>90%
Individual LED Output	60pcs high power LED's 65Lm/w
Colour Temperature	2700K ~ 6000K available
Colour Rendering Index	>70
Heat under standard working conditions	50°C ± 5°C
Working Temperature	-35 ~ 45°C
Life Span	50,000 hrs
Radiating Angle	100°
Mounting Height	4 ~ 6 meters
Protection grade	IP65
Dimensions (L x W x H)	470.5 x 285.5 x 134 mm
Weight	4.8kgs
Materials (body & cover)	Aluminium die-cast shell with spray coated body (body in grey, silver-grey, black or white colour), 4mm strengthened safety glass
Product Applications	Advertising displays, Parking areas, Road Lighting, etc.

Specifications subject to change without notice

Ledlite-Power

9, Farnborough Business Centre, Eelmoor Road, Farnborough, Hampshire. GU14 7QN

Tel: +44 (0) 1252 515565 Fax: +44 (0) 1252 546021

e-mail: sales@ledlite-power.com web: www.ledlite-power.com

LEDlite Power is a subsidiary of Safety Power Group Ltd.